

MCT466HD

Heavy Duty NIR Moisture Gauge for Difficult Processing Environments

PROCESS SENSORS
CORPORATION 

MCT466HD

Heavy Duty NIR Moisture Gauge for Difficult Processing Environments

FEATURES

- Heavy Duty Stainless Steel Enclosure
- Resistant to High Temperatures
- Sealed for Wash Down Environments
- Reliable, Continuous Moisture Measurement

Specifications: MCT466HD

Measured NIR Constituents: _____ Moisture, Temperature
Measurement Technique: _____ NIR Reflection
Moisture Gauge/Product Distance: _____ 6-16 inches
(150-400mm)
Response Time: _____ 1-99 seconds. Damping,
Integration and Gated.
Power: _____ 15vdc from Operator Interface
Weight: _____ 43 lbs. (19.5 Kg)
Operating Temperature: _____ 0-65°C to 80°C with
Vortex cooler.
Enclosure: _____ 316 L3A Stainless Steel

Specifications: Operator Interface

Display: _____ Touch Screen LCD
Weight: _____ 7 lbs. (3.5 Kg)
Outputs: _____ 4-20 mA or 0-10V, RS-232/485
Power: _____ 110/220 volts, 24vdc Optional
Cable: _____ 10 ft (3 meters) standard,
maximum 100 ft (30 meters)
Keypad: _____ Access to product codes,
calibration routines, diagnostics
Enclosure: _____ Polycarbonate

Options and Accessories:

Gauge Window Material _____ Kelf or Sapphire
Cooling: _____ Vortex Air Cooler

Maintenance:

Warranty: _____ 2 years
Routine Cleaning: _____ During scheduled plant maintenance
Calibration: _____ Once per year
Calibration Confirmation: _____ Calibration Check Standards



CE Compliance:

EMC directives EN50081-1 & EN5008-2, EN61010-1

Data Bus & Software Interfaces:

Optional Interfaces: _____ Ethernet, DeviceNet, Modbus, Profibus
Software: _____ Windows based PSC Viewer

Dimensions: MCT466HD

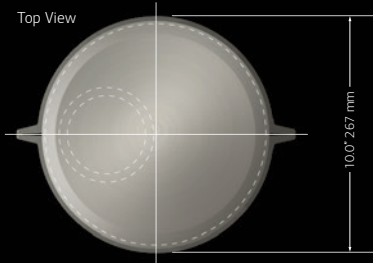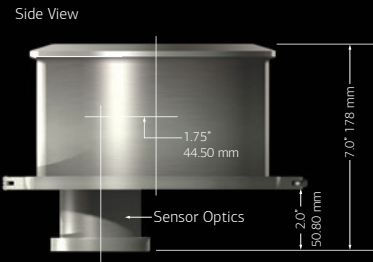

Dimensions: Operator Interface



HEADQUARTERS

United States

Process Sensors Corporation
113 Cedar St.
Milford, MA 01757 USA
Tel: (508) 473-9901
Fax: (508) 473-0715
info@processsensors.com

Europe

Process Sensors Europe
Unit 4, Adelaide House
Corbygate Business Park
Corby, Northants NN17 5JG UK
Tel: 01536 408066
Fax: 01536 407813
infouk@processsensors.com

Eastern Europe

Process Sensors Polska
Ul. Modlinska 310/312 lokal 216
03-152 Warszawa
Poland
Tel: (48) 22 6739526
Fax: (48) 22 6739527
Gsm: (48) 509 202759
tomasz@processsensors.com

ASIA - Process Sensors Asia

PT 2328 Pinggiran Golf
Kemumin, Pengkalan Chepa
Kota Bharu, Kelantan 16100
Malaysia
T: 011 60 17620-2806
F: 011 60 6601 4588
hussin@processsensors.com

For more information on Process Sensors products,
visit our website at:

www.processsensors.com

PROCESS SENSORS
CORPORATION

